



**High Quality Woodcare Products**  
**Industrial Finishes**



# Liming Effect

## ATOLL DUST

### PRODUCT DESCRIPTION

ATOLL DUST is a special powder that gives a rustical liming effect.

### RANGE OF APPLICATION

Industrial application for wood flooring and wood panels. Only for interior use.

### PACKAGING

5 kg - 20 kg

### SHELF-LIFE

In well-closed and original packaging: minimum 24 months.

### WAREHOUSING

At 10 - 40 °C

### TECHNICAL DATA

Extra component:	-
Mixing ratio:	Optional 10% - 20% in water
Pot-life:	-
Density:	2.9 kg/l
Viscosity:	-
Colors:	Off white
Solid content:	100%
Gloss:	-
Thinner:	Water
Coverage per coat:	Depending on the effect to achieve.
Coverage USA per coat:	Depending on the effect to achieve.
Drying:	3 hrs - 4 hrs at room temperature. Forced drying possible.

### PROTECTION

UV OIL or HARDWAXOIL MAGIC finish. For UV OIL finish seal first the ATOLL DUST surface with ECOFIX or OCULTO.

### APPLICATION


#### Preparation substrate:

Prepare the wood well by sanding or brushing. Brush the woodgrains carefully, remove the dust. Apply ATOLL DUST on rough prepared wood or stained wood.

#### Processing:

- Mix 100:10 ATOLL DUST with water.
- Stir well, spray the surface approx. 50 gr/m<sup>2</sup>.
- Dry on room temperature or dry with hot air oven.
- For heavy ATOLL DUST effect, rub up dry ATOLL DUST with a cloth or pad.
- Remove the excess of ATOLL DUST.

### APPLICATION MATERIAL



**Brushing**

**Spray**  
ATOLL DUST 10-20%

**Forced Drying**  
Hot Air - IR

# ATOLL MILK

## PRODUCT DESCRIPTION

ATOLL MILK is a special liquid that gives a rustical liming effect.

## RANGE OF APPLICATION

Industrial application for wood flooring and wood panels. Only for interior use.

## PACKAGING

5lt - 25lt

## SHELF-LIFE

In well-closed and original packaging: minimum 12 months.

## WAREHOUSING

At 10 - 40 °C

## CLEANING

HYDRO CLEANER 7984

## TECHNICAL DATA

Extra component:	-
Mixing ratio:	-
Pot-life:	-
Density:	1.54 kg/l
Viscosity:	Cream / Pasty
Colors:	Off white
Solid content:	-
Gloss:	-
Thinner:	Water
Coverage per coat:	ca. 50 g/m <sup>2</sup>
Coverage USA per coat:	ca. 5 g/ft <sup>2</sup>
Drying:	3 hrs - 4 hrs at room temperature. Forced drying possible.

## PROTECTION

UV OIL or HARDWAXOIL MAGIC finish. For UV OIL finish: seal first the ATOLL DUST surface with ECOFIX or OCULTO.

## APPLICATION


### Preparation substrate:

Prepare the wood well by sanding or brushing. Brush the woodgrains carefully, remove the dust. Apply ATOLL MILK on rough prepared wood or stained wood.

### Processing:

- Stir well, apply on the surface approx. 50 gr/m<sup>2</sup>.
- Dry on room temperature or dry with hot air oven.
- Remove the excess of dust if needed.

## APPLICATION MATERIAL

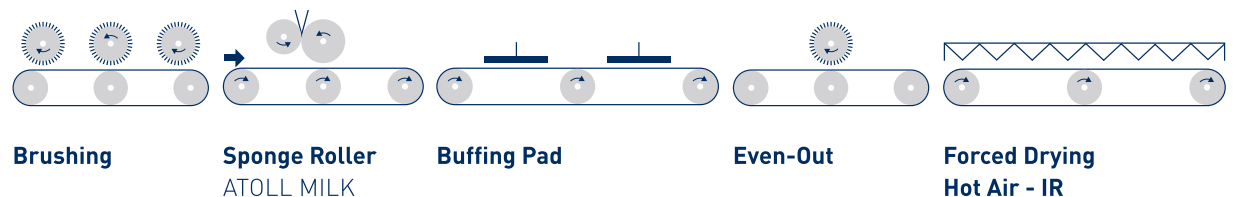



[www.industry.blanchongroup.com](http://www.industry.blanchongroup.com)

Onledebeekstraat 9 - 8800 Roeselare Beveren | Tel. +32 (0)51 30 11 40 - E-mail: [info@ciranova.be](mailto:info@ciranova.be)



A brand of  **Blanchon**  
Group

50, 8<sup>ème</sup> rue | 69800 Saint-Priest  
Tel. +33 472 89 06 06  
[www.blanchongroup.com](http://www.blanchongroup.com)